

ENTRANCE QUOTE REQUEST FORM

 Customer: _____
 Contact: _____
 Phone: _____ Cell: _____
 Fax: _____
 E-mail: _____

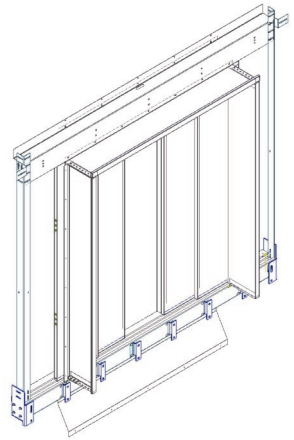
 Job Name: _____
 Location: _____
 Required Ship Date: _____
 Shipping Address: _____

| Frame Construction (2" square profile) | |
|--|---|
| <input type="checkbox"/> Bolted (standard) | <input type="checkbox"/> Welded and Mitered |

| Entrance Wall Material |
|--|
| <input type="checkbox"/> Gypsum <input type="checkbox"/> CMU/Concrete <input type="checkbox"/> Other _____ |

| Frame Information |
|---|
| Frame Finish: <input type="checkbox"/> Primed <input type="checkbox"/> Primed & Painted <input type="checkbox"/> #4 Stainless Steel <input type="checkbox"/> #8 Stainless Steel <input type="checkbox"/> #4 Bronze/Muntz <input type="checkbox"/> #8 Bronze/Muntz <input type="checkbox"/> Other _____ |
| Entrance Wall Thickness _____ *If wall materials and thickness are different at openings please specify |
| Frame Material Thickness: <input type="checkbox"/> 16 Gauge (standard) <input type="checkbox"/> 14 Gauge *If Bronze/Muntz is specified above the frames will be wrapped in 18 Gauge |

Project Data

 Capacity: _____
 Class: _____
 Code: _____
 Total Travel: _____
 Platform Width: _____
 Clear Hoistway Width: _____
 Facia Required Yes No
 *MEI presumes platform is centered in hoistway


| Sill Material |
|--|
| <input type="checkbox"/> Aluminum (standard) <input type="checkbox"/> Nickel Silver <input type="checkbox"/> Stainless Steel <input type="checkbox"/> Bronze/Muntz <input type="checkbox"/> Grouted <input type="checkbox"/> Groutless |

| Floor to Floor | Floor to Floor |
|----------------|----------------|
| 9 | 17 |
| 8 | 16 |
| 7 | 15 |
| 6 | 14 |
| 5 | 13 |
| 4 | 12 |
| 3 | 11 |
| 2 | 10 |
| 1 | 9 |

| Door Information | |
|--|--|
| Front: Quantity _____ | <input type="checkbox"/> GAL Drilling (standard) |
| Door Opening: Width _____ x Height _____ | <input type="checkbox"/> Other _____ |
| Door Type: | |
| <input type="checkbox"/> Single Speed | |
| <input type="checkbox"/> Two Speed | |
| <input type="checkbox"/> Center Opening | |
| <input type="checkbox"/> Two Speed Center Opening | |
| <input type="checkbox"/> Rear <input type="checkbox"/> Side Quantity _____ | |
| Door Finish: | |
| <input type="checkbox"/> Primed | |
| <input type="checkbox"/> Primed & Painted | |
| <input type="checkbox"/> #4 Stainless Steel | |
| <input type="checkbox"/> #8 Stainless Steel | |
| <input type="checkbox"/> #4 Bronze/Muntz | |
| <input type="checkbox"/> #8 Bronze/Muntz | |
| <input type="checkbox"/> Other _____ | |

| Door Operator By Others: |
|--|
| <input type="checkbox"/> GAL Drilling (standard) <input type="checkbox"/> Other _____ |

| Additional Options |
|--|
| <input type="checkbox"/> Cut outs required in frames <input type="checkbox"/> Fire Service <input type="checkbox"/> Access <input type="checkbox"/> Other _____ <input type="checkbox"/> Jamb Braille by MEI Jamb Braille Marking _____ <input type="checkbox"/> Self Adhesive <input type="checkbox"/> Pin Mount <input type="checkbox"/> Stud Mount <input type="checkbox"/> Keyholes - Entrance doors (KMO) What landings: _____ <input type="checkbox"/> Tri-Locks What landings: _____ <input type="checkbox"/> Sound Deadening Frames <input type="checkbox"/> Yes <input type="checkbox"/> No Doors <input type="checkbox"/> Yes <input type="checkbox"/> No |

Standard Spec:

 Frames: Enamel - cold rolled A-1088, Stainless 304, Bronze/Muntz 60/40 wrapped 18ga
 Doors: 16 ga cold rolled steel construction wrapped with 20 ga stainless or 18 ga Bronze/Muntz
 Fascia: 14ga Galvanield -- Header: 12 ga steel enamel -- Struts: 10 ga steel enamel
 Frames and Door: Bronze/Muntz will be powdered clear coated with 20% gloss
 UL Ratings: All doors are UL rated, All frames with gypsum wall construction are UL rated