

REPLACEMENT DOORS ONLY REQUEST FORM

 Customer: _____
 Contact: _____
 Phone: _____ Cell: _____
 Fax: _____
 E-mail: _____

 Job Name: _____
 Location: _____
 Required Ship Date: _____
 Shipping Address: _____

Door Information

Entrance Allowable Information:

	Max Width	Max Height
Single Speed Side Opening	42"	96"
Two Speed Side Opening	84"	96"
Single Center Opening	50"	96"
Two Speed Center Opening	100"	96"



Quality crating with doors packaged on end to keep them straight.
 Doors shipped with a maximum of 2400lbs per crate - lighter crating available on request.

Required Information:

Standard Entrance Door Finish's #4 (304)SS

<input type="checkbox"/> WHITE	<input type="checkbox"/> CREAM	<input type="checkbox"/> LIGHT IVORY	<input type="checkbox"/> ALLADIN BLUE
<input type="checkbox"/> BLACK	<input type="checkbox"/> AGATE GREY	<input type="checkbox"/> STONE GREY	<input type="checkbox"/> TARPULIN GREY

Non Standard Door Finish - Longer Lead Time: OTHER _____
 #4 (316)SS #8 (304)SS 5SMRIMEX _____

Entrance Doors (UL Labeled):				
Door Hand	Door Speed	Opening Size - W x H	Landing Qty	EM Key Layout
(left, right, center)	(1, 2)	(not panel size)	(not panel Qty)	(KMO, Tri Lock, Plain)

Standard Cab Door Finish's #4 (304)SS

<input type="checkbox"/> WHITE	<input type="checkbox"/> CREAM	<input type="checkbox"/> LIGHT IVORY	<input type="checkbox"/> ALLADIN BLUE
<input type="checkbox"/> BLACK	<input type="checkbox"/> AGATE GREY	<input type="checkbox"/> STONE GREY	<input type="checkbox"/> TARPULIN GREY

Non Standard Door Finish - Longer Lead Time: OTHER _____
 #4 (316)SS #8 (304)SS 5SMRIMEX _____

Cab Doors (NOT Labeled):				
Door Hand	Door Speed	Opening Size - W x H	Opening Qty	For CLOSING Direction Looking From HALLWAY Please See Image Below
(left, right, center)	(1, 2)	(not panel size)	(1, 2, 3)	

Door Skin Thickness (SS): 20 Ga 16Ga

Sound Deadening Doors: Yes No



Door Operator: GAL Other/Specify* _____
 * If checked provide Drawings

Header: Yes No

Must Supply A, B & C dimensions along with overall length.

A: _____
 B: _____
 C: _____

Overall Length of Header: _____
 Header will need to be drilled onsite.

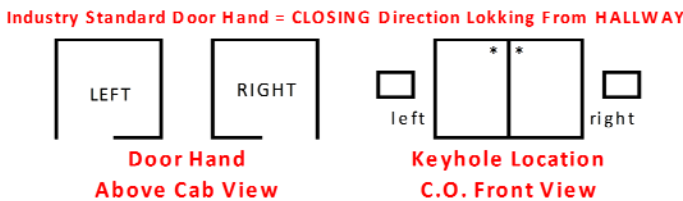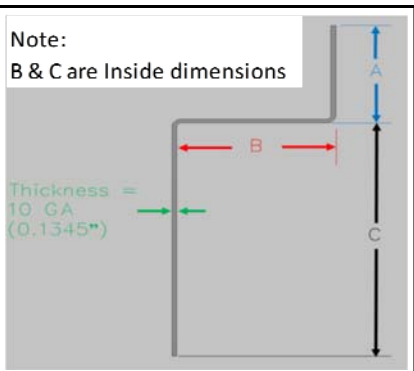

Door Construction Detail - (Entrance & Cab doors are 1.25" Thickness Only)

- 1) Entrance Doors 1.5" hour fire rating UL label - (Cab Doors NOT labeled)
- 2) Doors are hand specific and would have to be drilled out to accommodate being the opposite hand
- 3) Painted doors have no cladding as a standard (gloss paint will require a sheet steel skin)
- 4) Otherwise doors can be clad in 20ga. Stainless. (16ga. Optional)
- 5) Use (2) Nylube slide door guides (gibs) with (1) 14ga. Safety retainer gib (per door panel). Doors are not drilled.
- 6) Drilled for GAL door operator. (Drawings required for any other door operator).
- 7) Sight guard finish matched door finish.
- 8) If the door is a non-standard height (not 84"), and a KMO is required, the Hole location is needed from the top of the door.

MEI does not supply Integral Doors or Headers

Standard Spec: Doors: 16 ga cold rolled steel construction with 14ga stiffeners painted black wrapped with 20 ga #4 stainless
 No Center Opening MEI doors are allowed in Canada at this time