

**Traction MRL Passenger
Quote Request Form**

19336 607th Ave
Mankato MN 56001
Ph (507) 245-3060 Fax: (507) 245-4198
An EOE/AA Employer

Today's Date: _____
Quote Due Date: _____

Customer: _____
Contact: _____
Address: _____
Phone: _____ Fax: _____
Email: _____

Job Name: _____
Job Location: _____

- New Construction
 Modernization

Capacity: _____
Class of Loading: _____ Landings: _____ Hoistway Width: _____ Overhead: _____
Gross Weight: _____ Front Openings: _____ Hoistway Depth: _____ Pit Depth: _____
Travel: _____ Rear Openings: _____ Platform Width: _____ Voltage: _____
Speed: _____ Side Openings: _____ Platform Depth: _____ Phase: _____

Electrical Rating: Hoistway: * NEMA 1 NEMA: _____ Code: ASME A17.1 _____ (yr)
Machine Room: * NEMA 1 NEMA: _____ IBC _____
 Other Codes _____

* Indicates MEI standard materials

HOISTWAY MODULE

- INCLUDE THIS SECTION IN QUOTE**
- Platform subfloor material: _____ * 1 Layer 3/4" Plywood Other: _____
Platform Finish Floor Thickness: _____ weight _____ sq. ft (F/F by others)
- Sling, Painted Black Other: _____
 Spring Buffers Oil Buffers Seismic Zone _____ (2,3,4)
 Rail Guides: Slide * Roller Swivel Government Submittal Package
 Limit Switch Package, Car Top Station Certified Engineer Stamp on Drawings
 Maintenance Manuals Under car light with outlet
 Other: _____ Platform Isolation Full Partial
Isolation Standards: 6000 lbs. or Less - Fully Isolated
Over 6000 lbs. - Partially Isolated to 10,000 lbs

TRACTION MRL MACHINE ROOM

- INCLUDE THIS SECTION IN QUOTE**
- Overhead 21 Hollister Whitney MRL Gearless Machine

MRL CONTROLLER MODULE

INCLUDE THIS SECTION IN QUOTE

- Manufacturer: *Elevator Control Corp. GAL Motion Control Engineering
- Operation: * Selective-Collective * Single Automatic Pushbutton Call-Send
- *Simplex Duplex Group
- Features: * Phase I & II Fire Service * Independent Service * Nudging
- * Tape Selector Homing Hospital Service
- *On-Board Diagnostics *Reverse Phase Detector EMT -Code Blue
- Hand Held Diagnostic Emergency Generator Interface Lobby Panel Interface
- Load-Weighing Inconspicuous Riser Monitor System Interface
- Card-Reader Interface Isolation Transformer
- Other: _____
- Controller Location Landing _____ Remote From Hoistway _____

ENTRANCE MODULE

INCLUDE THIS SECTION IN QUOTE

- Hoistway Wall Thickness: _____ " Block Drywall
- Jamb Construction: * Bolted Welded / Mitered Other: _____
- Jamb Finish: * Enamel / Primed Stainless Steel Bronze #4
- Door Finish: * Enamel / Primed Stainless Steel Bronze #4
- Sills: *Aluminum Nickel-Silver Bronze Stainless Steel
- Groutless Sill
- Miscellaneous: Sound-Deaden Doors Sound-Deaden Frames Weather-Stripping
- Others: _____

DOOR EQUIPMENT MODULE

INCLUDE THIS SECTION IN QUOTE

- *GAL (MOVFR) GAL (MOD) GAL (MOVFR W-Weather Resistant)
- Other: _____

DOOR PROTECTION MODULE

INCLUDE THIS SECTION IN QUOTE

- *Adams "Gatekeeper" Janus Panaforty Plus 3-D Protection
- Others: _____

FIXTURE MODULE

INCLUDE THIS SECTION IN QUOTE

- Type: * MEI Tilt Panel Stationary (Applied) Panel Full Swing
- Style: * Square Buttons Round Buttons Vandal-Resistant Buttons
- Finish: * Stainless Steel Bronze * #4 #8
- Features * Car Position Indicator
- Hall Position Indicator(s): Qty: _____
- * Car Lantern(s) Hall Lanterns (Pass only)
- * Hall Stations EMT Service – Code Blue
- *ADA Hands-Free Phone Service Cabinet
- * Top Access Keyswitch Independent Service Keyswitch
- Emergency Light Test Button 120 VAC Outlet
- Card-Reader Cut-Out Fireman's Phone Jack
- * Fan Keyswitch Special Engraving: _____
- Auxiliary Car Operating Panel *NEMA 1 (or other NEMA Ratings) _____
- Other: _____
- Certificate Frame
- Hospital Service
- Photo-Eye Keyswitch
- * Bottom Access Keyswitch
- * Inspection Keyswitch
- * Light Keyswitch

CAB MODULE

Overall Size

Platform Width: _____ x Depth: _____

Finished Floor Material/Thickness: _____

Cab Height: _____

Wall Configurations

Service Cab (Steel Shell)

Painted: _____

(choose from our standard paint colors or choose your own)

Metal: _____

(brushed, polished, or patterned stainless; brushed bronze)

Plastic Laminate

Laminate: _____

(choose from our plastic laminate chart)

Removable/Applied Panels

Removable Panel Applied Panel

Panel Finish: _____

(choose from our laminate chart or metal finishes)

Reveal/Frieze/Base: _____

(paint or metal finish, same options as steel shell service cab)

Glass Wall (s) (add to one of the cabs above)

Rear 1 Side 2 Sides Front

Frame Finish: _____ (brushed stainless, aluminum)

Door Configuration

Front Only Front & Rear Front & Side

Single-Speed Two-Speed

Opening: Right-Hand Left-Hand Center

Door Opening Width: _____ x Height: _____

Door Finish: _____

(painted; plastic laminate; brushed, polished, or patterned stainless; brushed bronze)

Transom, Return, & Jamb Finish: _____

(painted; brushed, polished, or patterned stainless; brushed bronze)

COP Location: Return Side Wall

Handrails

Location: Rear Wall Side Walls

Type: Round Flat Wood

Returned Ends: Yes No (for round or flat)

Handrail Size: _____ (see table below)

Material: _____

(brushed stainless or bronze for round or flat, maple or oak for wood)

Round Sizes	1-1/2" or 2" diameter
Flat Sizes (Hollow)	1/2" x 1-1/2"
Flat Sizes (Solid)	1/2" x 1-1/2" 3/8" x 2", 3", 4", 6" 1/4" x 4", 6"
Wood Sizes	1-1/2" x 5-1/2", 7-1/2", 9-1/2", 11-1/2"

Bumpers

Flat With Returned Ends Straight Ends

Wood

Bumper Size: _____ (see table below)

Material: _____

(brushed stainless for flat, maple or oak for wood)

Number of Bumper Rows: _____

Flat Sizes (Solid)	3/8" x 8", 1/4" x 8"
Wood Sizes	1-1/2" x 5-1/2", 7-1/2", 9-1/2", 11-1/2"

Ceiling/Lighting

Aluminum Frame Ceiling

w/Lexan Diffusers

w/Eggcrate Diffusers

Fluorescent Lights

LED Lights

Downlight Island Ceiling

Finish: _____

(painted; plastic laminate; brushed or polished stainless; brushed bronze)

High Voltage Incandescent Lights

Low Voltage Halogen Lights

Perimeter Lighting

Cove/Trough Lighting

Fluorescent Lights Recessed in Canopy

High Voltage Lights Recessed in Canopy

Low Voltage Lights Recessed in Canopy

Sill

Aluminum

Nickel Silver

Bronze

Stainless Steel

WIRING MODULE

INCLUDE THIS SECTION IN QUOTE


- * MEI Standard Package w/3 Pair Shielded Cable
- Additional Pair Shielded Quantity: _____
- Coaxial Cable Quantity: _____
- Other : _____

RAIL MODULE

INCLUDE THIS SECTION IN QUOTE

T-Shaped Rails are Provided

ELEVATOR DATA

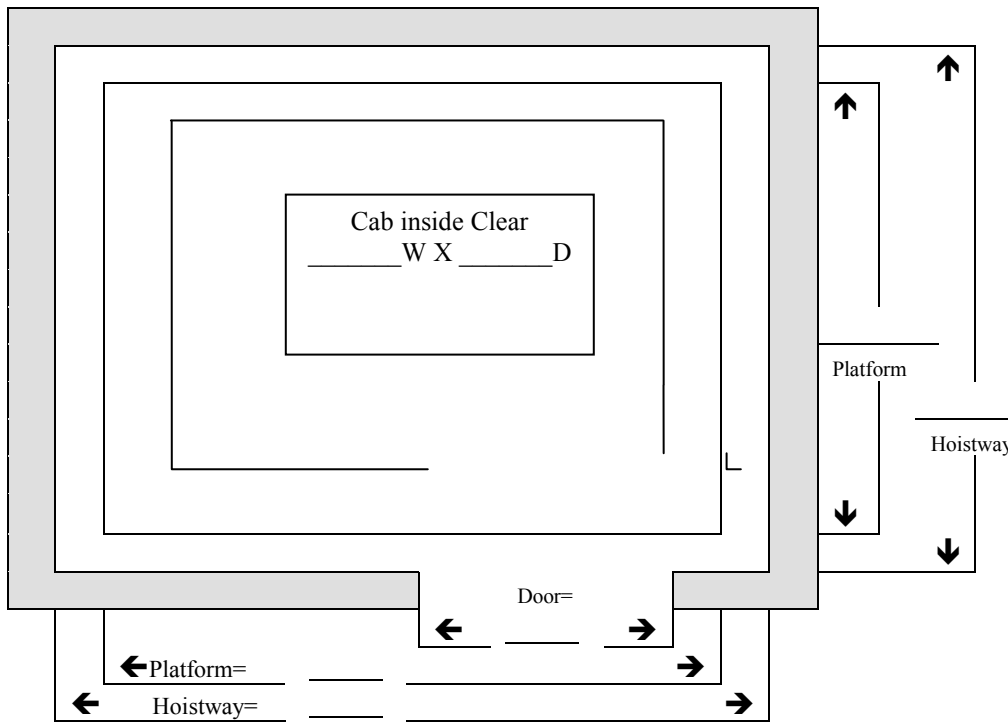

Enter Floor Markings & Travel
for Each Floor Served

Overhead		
12		12
11		11
10		10
9		9
8		8
7		7
6		6
5		5
4		4
3		3
2		2
1		1
Pit Depth		
Front		Rear

Arch. Prints Available? Yes No

Shared Hoistway Yes No